

JM PLUS

PV MODULE

JMP-435W-M672H-GWW/WB	435W
JMP-440W-M672H-GWW/WB	440W
JMP-445W-M672H-GWW/WB	445W
JMP-450W-M672H-GWW/WB	450W
JMP-455W-M672H-GWW/WB	455W



1500

High Voltage

UL and IEC 1500V certified; lowers BOS costs and yields better L



High Efficiency

Higher module conversion efficiency benefit from half cell structure (low resistance characteristic).



PID Resistance

Excellent Anti-PID performance guarantee limited power degradation for mass production.



Low-light Performance

Advanced glass and cell surface textured design ensure excellent performance in low-light environment.



Severe Weather Resilience

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance certified by TUV SUD.

*6BB and MBB products can be provided upon request.

WARRANTY

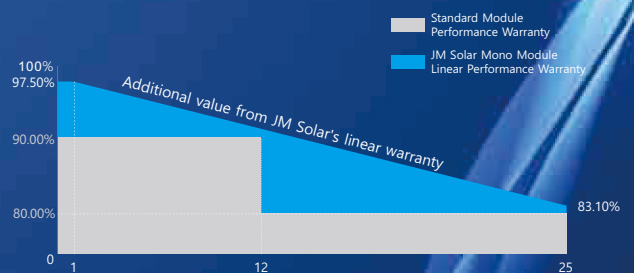

25 25-years Linear Performance Warranty

12 12-years Product Material & Workmanship

IEC61215
IEC61730
UL61215
UL61730



